

12V

2000A

GB70



START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

GAS & DIESEL

UP TO 8.0L GAS & 6.0L DIESEL.

Designed for gas engines up to 8 liters and diesel engines up to 6 liters for cars, SUVs, trucks, boats, RVs, and more.

USB

CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

40X

UP TO 40 JUMPSTARTS.

Compact, yet powerful lithium jump starter rated at 2,000 amps. Full power to jump start a vehicle up to 40 times on a single charge.

ULTRA SAFE

SPARK PROOF TECHNOLOGY.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.



30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



INTERFACE

POWER LED

The jump starter is in standby or the battery voltage is too low for the jump starter to detect.



POWER BUTTON

Push to turn unit "On" & "Off".



CHARGE LED

Indicates the charge level of the internal battery.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



ERROR

Illuminates Red if reverse polarity is detected. Blinks "on" and "off" in various sequences to convey error conditions.




MANUAL OVERRIDE.


Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into manual mode.



WHAT'S IN THE BOX

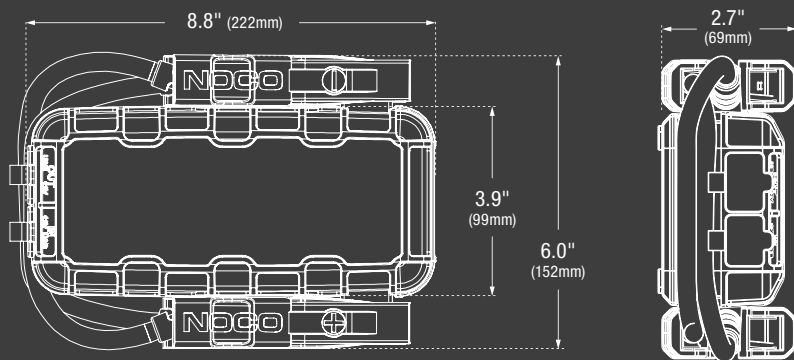

*Accessories not to scale with GB70



XGC Extension Cable



USB-MicroUSB




User Guide



XGC 12V Male Adapter



XGC 12V Female Adapter



Microfiber Storage Bag

CHARGE DEVICES.

Recharge your personal devices on the go, like smartphones, tablets, e-watches and more - up to 6 smartphone recharges.

RECHARGE TIME

0.5A	12hr
1A	6hr
2A	3hr

TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	56 Watt-Hour Lithium Ion																
PEAK CURRENT RATING:	2000A																
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)																
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)																
MICRO USB (INPUT):	5V, 2.1A																
USB (OUTPUT):	5V, 2.1A																
XGC (INPUT):	12 VDC, 3A Fast Charge																
XGC (OUTPUT):	12 VDC, 15A Power Supply																
HOUSING PROTECTION:	IP65 (w/Ports Closed)																
COOLING:	Natural Convection																
UNIT WEIGHT:	4 lbs (1.81kg)																
UNIT WEIGHT W/ CLAMPS & ACCESSORIES:	5 lbs (2.26kg)																
LED FLASHLIGHT:	400 Lumens																
VOLUMETRICS:	<table border="0"> <tr> <td>Retail Packaging:</td> <td>Master Carton:</td> </tr> <tr> <td>Dimensions: 7.28"x4.84"x9.80"</td> <td>Dimensions: 15.98"x10.83"x11.50"</td> </tr> <tr> <td>Weight: 5.09lbs</td> <td>Weight: 22.60lbs</td> </tr> <tr> <td>UPC: 0-46221-15005-6</td> <td>Quantity: 4</td> </tr> <tr> <td></td> <td>UCC: 10046221150053</td> </tr> <tr> <td>Inner Carton:</td> <td>Units Per Pallet:</td> </tr> <tr> <td>Dimensions: 10.27"x7.72"x5.39"</td> <td>NA - 180 Units</td> </tr> <tr> <td>Weight: 5.44lbs</td> <td>EU - 120 Units</td> </tr> </table>	Retail Packaging:	Master Carton:	Dimensions: 7.28"x4.84"x9.80"	Dimensions: 15.98"x10.83"x11.50"	Weight: 5.09lbs	Weight: 22.60lbs	UPC: 0-46221-15005-6	Quantity: 4		UCC: 10046221150053	Inner Carton:	Units Per Pallet:	Dimensions: 10.27"x7.72"x5.39"	NA - 180 Units	Weight: 5.44lbs	EU - 120 Units
Retail Packaging:	Master Carton:																
Dimensions: 7.28"x4.84"x9.80"	Dimensions: 15.98"x10.83"x11.50"																
Weight: 5.09lbs	Weight: 22.60lbs																
UPC: 0-46221-15005-6	Quantity: 4																
	UCC: 10046221150053																
Inner Carton:	Units Per Pallet:																
Dimensions: 10.27"x7.72"x5.39"	NA - 180 Units																
Weight: 5.44lbs	EU - 120 Units																

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

