



TPL series

TPL 121000T 12V 100AH



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.


Design for Standby Power Applications

<p>【Design Life】 Up to 12 Years in Standby Service at 25°C Eurobat (20°C) : 10-12 years, Long Life</p> <p>【Operating Temperature Range】 Nominal Operating Temperature : 25°C (77°F) Discharge : -15°C ~ 50°C (5°F~122°F) Charge: -15°C ~ 40°C (5°F~104°F) Storage: -15°C ~ 40°C (5°F~104°F)</p>	<p>【Float Charging Voltage】 13.5 ~ 13.8 VDC/Unit at 25°C (77°F)</p> <p>【Equalization Charging Voltage】 14.4 ~ 15.0 VDC/Unit at 25°C (77°F)</p> <p>【Self Discharge】 Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).</p>
---	---

Specification

Design according with IEC 60896-21/22:2004

Nominal Voltage	12V (6 cells per unit)		
Nominal Capacity	100AH @8HR-rate to 1.75V per PCS @25°C (77°F)		
Weight	Approx. 34.80 Kg (76.70 lbs)		
Maximum Discharge Current	800A (5sec)		
Internal Resistance	Approx. 4.00 mΩ		
Short Circuit Current	2132A		
Maximum Charge Current	30A		
Terminal types	I2 thread lead alloy terminal to accept M6 bolt		
Terminal hardware Torque	138.6 Kgf-cm / 120.3 Lbf-in / 13.58 N-m		
Container Material	Flame Retardant ABS (UL 94-V0) (Optional Cental Degassing Kit)		
Dimensions (mm/inch)	Length (L)	390.0±2.5 mm	15.35±0.10 inch
	Width (W)	105.0±1.5 mm	4.13±0.06 inch
	Overall Height (H)	280.0±2.5 mm	11.02±0.10 inch

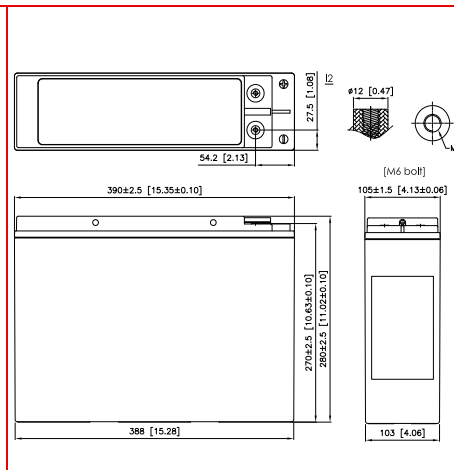

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.67V	203	123	72.6	52.9	41.9	29.8	23.4	19.4	16.6	12.9	10.7	5.55
1.70V	198	122	72.2	52.7	41.5	29.7	23.3	19.3	16.5	12.8	10.6	5.51
1.75V	184	117	71.1	52.0	41.2	29.4	23.1	19.2	16.4	12.7	10.5	5.47
1.80V	164	111	68.7	50.8	40.2	28.7	22.6	18.8	16.0	12.5	10.4	5.37
1.83V	148	105	65.9	49.2	38.9	27.9	22.0	18.3	15.7	12.3	10.1	5.24
1.85V	138	101	64.0	48.1	38.1	27.3	21.6	18.0	15.4	12.1	9.91	5.15

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.67V	2117	1370	843	619	488	344	270	223	192	152	127	66.6
1.70V	2069	1361	837	615	487	342	268	222	190	149	124	65.6
1.75V	1944	1327	828	611	482	341	265	221	189	148	123	65.3
1.80V	1753	1261	798	598	472	334	262	217	187	147	122	65.0
1.83V	1611	1211	768	581	457	326	256	213	183	145	121	63.6
1.85V	1516	1177	748	569	447	320	252	210	181	144	120	62.6

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 170201

Sales Offices

日立化成能源科技股份有限公司
Hitachi Chemical Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488, 8831-6775
Fax: +86-755-8831-6075

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622, 5046-0833
Fax: +86-21-5046-1046

TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-5820-5336, 5820-5338
Fax: +86-10-5820-3053

Recognized under UL 1989,
and certified by ISO 9001, 14001.

