



## Yuasa Technical Data Sheet

### Yuasa YBX7014 - YBX7000 EFB Start Stop Plus Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 65Ah |
| Cold Cranking Amps (EN1) | 620A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 232mm |
| Width  | 173mm |
| Height | 225mm |

#### Weights & Measures

|                       |            |
|-----------------------|------------|
| Mean Weight with Acid | 17.3kg     |
| Acid Volume           | 4.1 litres |



#### Container Features

|                           |                         |
|---------------------------|-------------------------|
| Case Type                 | D23 JIS EFB (Q55R/Q85R) |
| Cell Layout               | 1                       |
| Terminal Type             | T1                      |
| Hold Down                 | N                       |
| State of Charge Indicator | ✓                       |
| Lid Type                  | Raised Plug             |


#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Separator               | PE          |
| Recommended Charge Rate | 4A          |
| Performance Marking     | W3-C2-V3-M1 |

#### Terminal Type

##### T1


Standard DIN Post

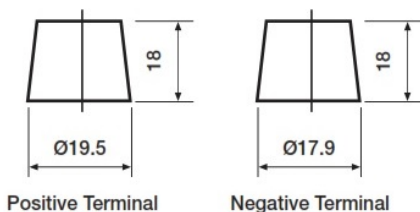

Positive Terminal

Negative Terminal

#### Cell Assembly Layout

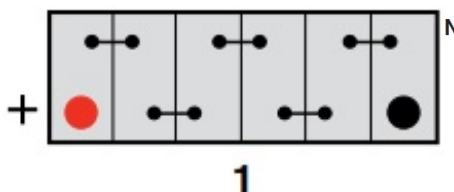

#### Battery Hold-down

